


S³ TECHNOLOGIES WALL FINISHING SYSTEMS


PREMIUM QUALITY WALL FINISHING
LONG LASTING & SMOOTH FINISHING SOLUTION

BLOCK WALL (LIGHTWEIGHT / ALC)

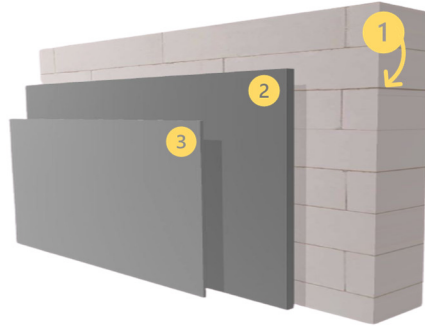

INTERNAL

- ① **SmartGrip ALC** (Lightweight Block & Panel Joint Adhesive) *¹
- ② **SmartCote 61/62/60** (Base Skim Coat) *²
- ③ **SmartCote 50/72** (Finish Skim Coat) *³

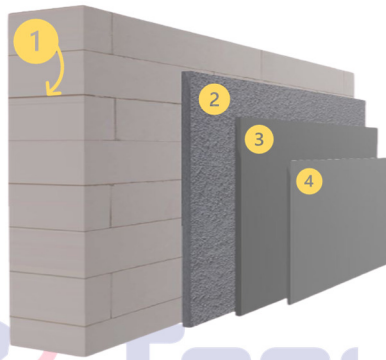

EXTERNAL

- ① **SmartGrip ALC** (Lightweight Block & Panel Joint Adhesive) *¹
- ② **SmartTP 95** (Thin Plaster) *²
- ③ **SmartCote 61/62/60** (Base Skim Coat) *³
- ④ **SmartCote 50/72** (Finish Skim Coat) *⁴

No.	Internal		External
1	2 – 4 mm thickness (SmartGrip ALC)	BL	2 – 4 mm thickness (SmartGrip ALC)
2	- NIL -	P	8 – 12 mm thickness (SmartTP 95)
3	2 – 3 mm thickness (SmartCote 61/62/60)	B	2 – 3 mm thickness (SmartCote 61/62/60)
4	1 – 2 mm thickness (SmartCote 50/72)	F	1 – 2 mm thickness (SmartCote 50/72)

Consumption of materials :

SmartGrip ALC	18 – 20m ² of blocks per 40kg bag
SmartTP 95	0.6m ² /kg/mm thickness
SmartCote 61/62/60	0.65m ² /kg/mm thickness
SmartCote 50/72	0.75m ² /kg/mm thickness

Good wall finishing system guidelines :

- BL Step 1 – Block/Panel Laying
- P Step 2 – Plastering
- B Step 3 – Base Skim Coat
- F Step 4 – Finish Skim Coat

Remarks :

The wall system solutions proposed in this guide serves as a recommendation guide which is specially designed to meet the highest standard of architectural construction requirements against **CONQUAS** Construction Quality Assessment System, which is intended to be applied with good engineering and workmanship practices in accordance with the manufacturer's instructions.

System solutions may vary according to each project's design & requirements.

*1 – To be laid in full mortar bed on the block joints using the appropriate notched trowel. Manufacturer must comply to approved International Quality System (ISO9000 Series) and approved Environmental Management System (ISO14000 Series)

*2 – SmartCote 61/60 is Grey colour, SmartCote 62 is White colour. Selection of SmartCote 61/62 & 60 depends on **texture requirements** of the client.

*3 – SmartCote 50 is Grey colour, SmartCote 72 is White colour