


S³ TECHNOLOGIES WALL FINISHING SYSTEMS

PREMIUM QUALITY WALL FINISHING
LONG LASTING & SMOOTH FINISHING SOLUTION

SOFFIT / CEILING

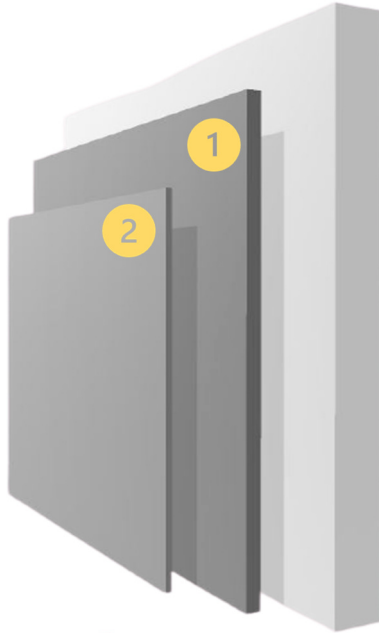

INTERNAL

- ① **SmartCote 61/62/60** (Base Skim Coat) *1
- ② **SmartCote 50/72** (Finish Skim Coat) *2

| No. | Internal | | External |
|-----|---|---|----------|
| 1 | 2 – 3 mm thickness (SmartCote 61/62/60) | B | NIL |
| 2 | 1 – 2 mm thickness (SmartCote 50/72) | F | NIL |

Consumption of materials :

| | |
|--------------------|-------------------------------------|
| SmartCote 61/62/60 | 0.65m ² /kg/mm thickness |
| SmartCote 50/72 | 0.75m ² /kg/mm thickness |

Good wall finishing system guidelines :

- B Step 3 – Base Skim Coat
- F Step 4 – Finish Skim Coat

Remarks :

The wall system solutions proposed in this guide serves as a recommendation guide which is specially designed to meet the highest standard of architectural construction requirements against **CONQUAS** Construction Quality Assessment System, which is intended to be applied with good engineering and workmanship practices in accordance with the manufacturer’s instructions.

System solutions may vary according to each project’s design & requirements.

*1 – SmartCote 61/60 is Grey colour, SmartCote 62 is White colour. Selection of SmartCote 61/62 & 60 depends on **texture requirements** of the client.

*2 – SmartCote 50 is Grey colour, SmartCote 72 is White colour